



PLANO 3D


THE 360° LINE LASER FOR HORIZONTAL AND VERTICAL LEVELLING

**WE DEVELOP TOGETHER
WITH PROFESSIONALS.
FOR PROFESSIONALS.**

Discover the compact universal line laser with one horizontal and two vertical 360° lines and a measuring tolerance of just 0.20 mm/m.

HIGHLIGHTS

- ▶ 3 × 360 degree line panorama
- ▶ Wall cross, ceiling cross, floor cross in one Laser
- ▶ Sharp laser lines over the entire working area

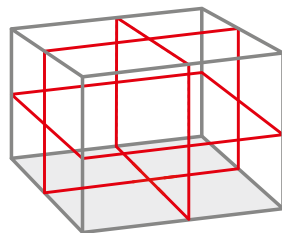


APPLICATIONS

Simply set it up, switch it on and the Plano 3D is ready to project laser lines in any room. The laser lines can each be switched on individually at the touch of a button, offering a whole range of new applications for simultaneous marking, alignment and levelling.



The Plano 3D not only makes dry and interior construction projects more precise, but also more efficient and convenient.

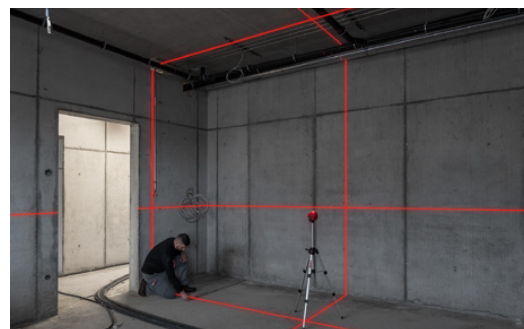

Together with the horizontal 360° laser line, the vertical lines form a 90° angle, which form a wall cross, ceiling cross or floor cross at their intersections.



Vertical plumbing can be carried out precisely with the help of the floor and ceiling cross. This allows you to transfer your measuring points, e.g. for installing spotlights or ceiling panels quickly and conveniently.



The precise 90° angle enables perfect alignment when installing equipment and furniture. It is also a helpful tool for assembly work, such as building walls and suspending ceilings.

ORDERING INFORMATION



Includes

- PLANO 3D laser
- Laser visibility glasses
- MH Magnetic bracket
- 4 × Mignon (AA) batteries
- Quick Starter
- Case

Plano 3D item no. 71015301

Technical data

Max. measurement tolerance	±0.20 mm/m
Operating range without hand-held receiver (radius)	20 m*
Operating range with hand-held receiver (radius)	80 m*
Tripod adapter	1/4" & 5/8"
Protection type	IP54
Power supply	4 × 1.5 V Mignon (AA) batteries
Operating time (at 20 °C)	5 h (all Diodes)
Laser class	2, DIN EN 60825-1:2014
Wavelength	635–650 nm < 1 mW
Dimensions	125 × 100 × 115 mm

* Depending on the ambient conditions in the workplace.

ACCESSORIES



Receiver

In combination with a hand-held receiver, the laser can reach a distance of up to 80 m. The clearly visible lines can be switched on at the touch of a button.

Hand-held receiver REC LRD0

item no. 71110801



Flexible wall mount FWH

item no. 71123801

Compact tripod FST

item no. 71121701

Clamping rod KLST

item no. 71122001

Threaded adapter set GA-SET

item no. 71115941

Magnetic Target, red ZS RED

item no. 71126401

Further information can be found at www.sola.at