



FLOX


THE POWERFUL PROFESSIONAL LASER FOR TILERS AND FLOORERS

**WE DEVELOP TOGETHER
 WITH PROFESSIONALS.
 FOR PROFESSIONALS.**


Discover the FLOX floor and cross-line laser with a front-projected floor cross and a levelled wall cross with a measuring tolerance of 0.3 mm/m or 0.5 mm/m.

HIGHLIGHTS

- ▶ Front-projected floor cross and levelled wall cross in one laser
- ▶ Far visible laser lines in all directions
- ▶ Rotary foot and fine adjustment

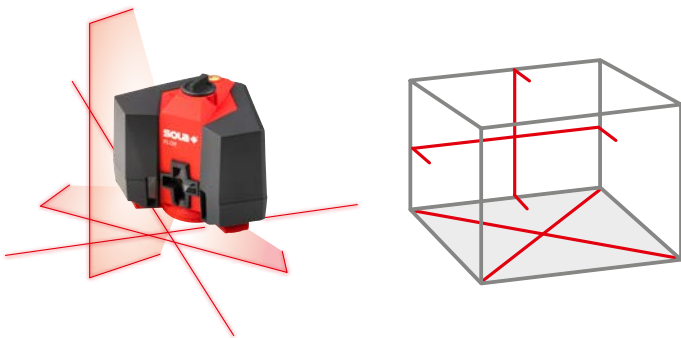

The FLOX has a 1/4" and 5/8" thread, which can be used to attach it easily on a tripod. This way, the levelled wall cross can also be used when fixing tiles to walls.

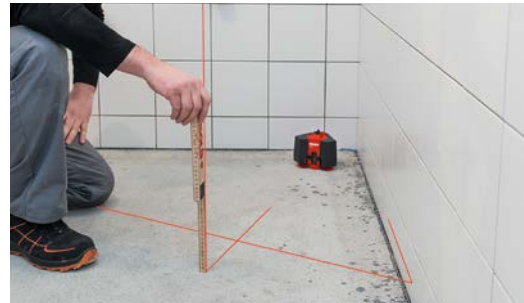

The device can also be used to quickly and easily check that floors are level thanks to its horizontal laser line, which is beamed just above the ground. The floor's properties can then be defined by using a folding rule.

APPLICATIONS

With four laser lines that are far visible and are projected to the front and the back of the device, it can be used even in complex spatial situations without the need for relocation. Once set up, the FLOX can be used to lay tiles and flooring in all possible directions.



By directing the laser's floor lines close to a wall, users can easily check that the wall is perpendicular.



Thanks to its sturdy rotary foot, the FLOX is extremely flexible in terms of alignment: tiles can be laid out directly against the device and/or the laser can be used as an end point reference.

The additional fine adjustment also enables users to set and align the FLOX with millimetre accuracy.

ORDERING INFORMATION



Includes

- › FLOX Floor and Crossline Laser
- › Laser visibility glasses
- › Battery adapter BA
- › 3 x AA batteries
- › Quick Start
- › Case

FLOX

item no. 71017301

Technical data

Max. measurement tolerance Laser lines	±0.30 mm/m (floor), ±0.50 mm/m (wall)
Self-levelling range	±3°
Operating range	r=30 m (floor)/10 m (wall)
Operating temperature	-10 °C to +50 °C
Tripod adapter	1/4" & 5/8"
Protection type	IP54
Power supply	3 x 1.5 V Mignon (AA) batteries, SOLA-Li-Ion battery 5.2 (5200 mAh)
Battery life (at 20 °C)	batteries: 9 h floor, 40 h wall, battery: 24 h floor, 65 h wall
Laser class	2, DIN EN 60825-1:2014
Output	< 1.0 mW
Wavelength	635 nm
Dimensions	150 x 119 x 122 mm

* Depending on the ambient conditions in the workplace.

ACCESSORIES



Compact tripod FST

item no. 71121701



Wall mount WH

item no. 21123901

Threaded adapter set GA-SET

item no. 71115941

SOLA Li-Ion Battery set 5.2

item no. 71113901

Further information can be found at www.sola.at

